



Rev.	Description	Reveser/Date


A

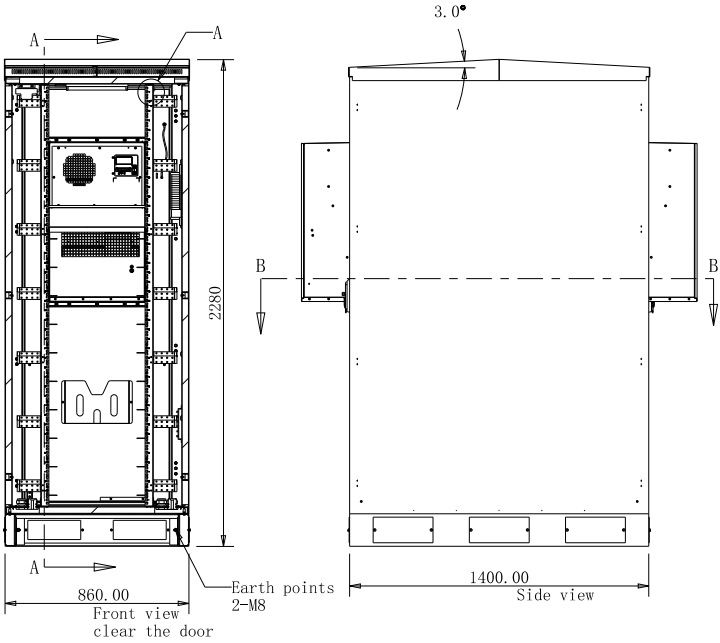

1*UK type 220V outlet,
1*16 pin terminalblock
(UK2. 5N)

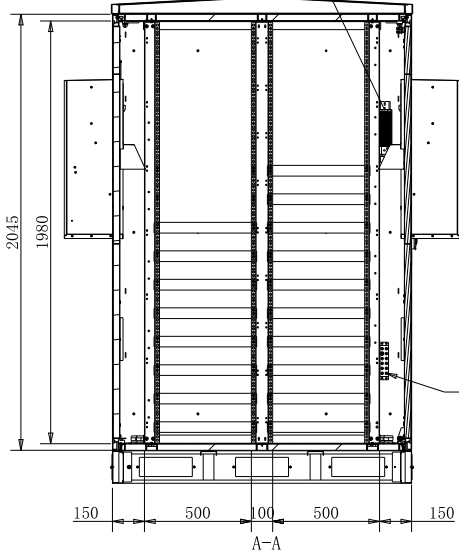

Ground bar




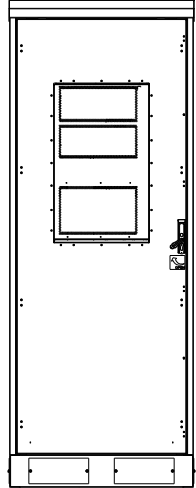


B

B

C

C

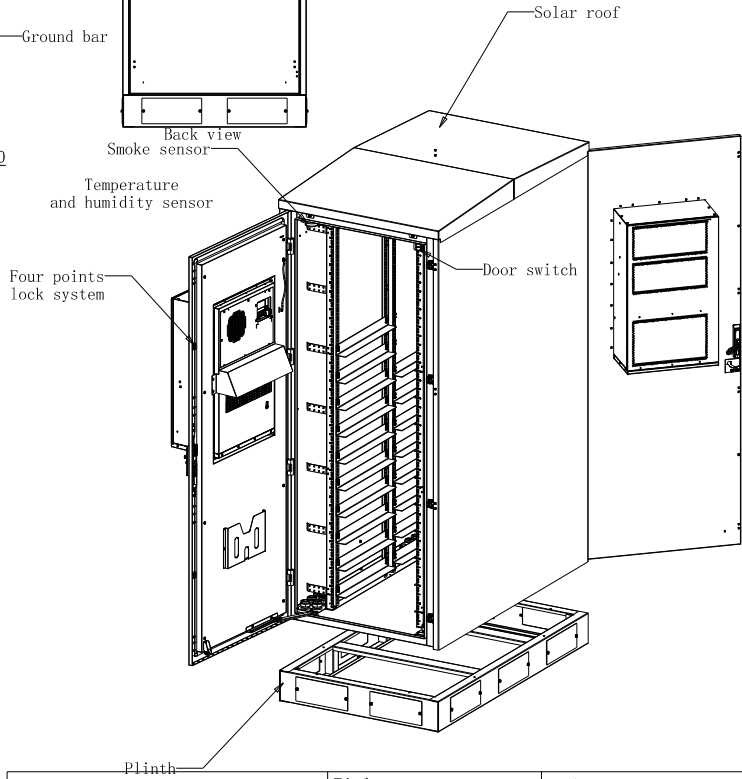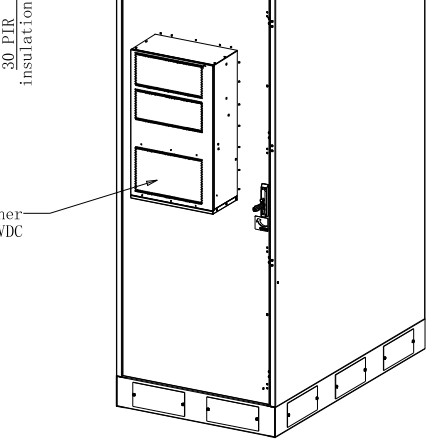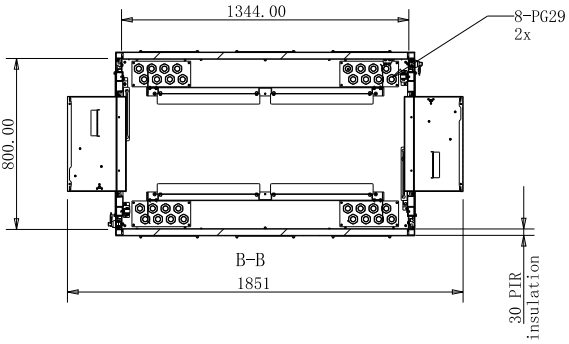

- Note:
- 1, 84U Outdoor Cabinet exterior dimensions of H2280xW860xD1400mm, including plinth H150mm
 - 2, Double wall,hot dip galvanized with sandwich panel insulation
 - 2.1 External layer: 2mm thickness
 - 2.2 Internal layer: 0.8mm thickness
 - 2.3 Insulation thickness 30mm with density45KG/m³
 - 3, Color: RAL7035/Pantone 428C Powder Coating finishes
 - 4, Ingress protection: IP55
 - 5, Cabinet fully equipped with 19" twin rack,44RU space. Material steel,thickness 2mm, finish zinc plate
 - 6, Front&back door with Air conditioner 2000W 48VDC
 - 7, Mounting method: Floor mounted Cabinet contains: 1*DC 48V Temperature and humidity sensor,1*DC 48VSmoke sensor , 4*Door limit sensor , 2*DC 48V 5W LED light, 1* Document holder, 1*UK type 220V outlet, 1* Groundingbar, 36*L-rail,2*8*PG29 1*16 pin terminal block (UK2. 5N)

D

 SPRING SYSTEM INTEGRATION			Title 36KW Power 84RU double door ODU		Code 02384011000		
					First Proj	Scale	Rev.
	Name	Date	Finish *			0.04	A1.0
Design	Jack wang	22-Aug-23				Project:	
Drawn			Material *		Page 1 of 1		*
Checked					Spring System Intergration Co.,Ltd		
Approved							