
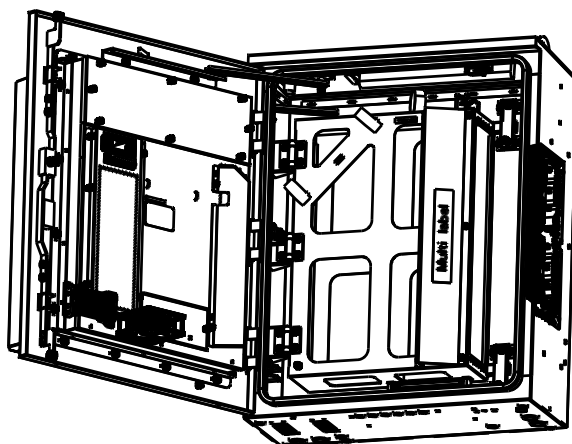


比例 0.200



技术要求

1. 表面不允许有毛刺, 划伤。
2. 无漏装 错装

版次	说 明 描 述	说 明 者 / 日 期
A1.0	文件名更改 取消“样品标识” 作为量产图纸发布	张红文/2017-8-18
A2.0	关键更改, 因 ERS6345-100000 有更改	张红文/2017-9-26
A3.0	按安波PUI 接插板螺钉由 M4×1-10 的六角大螺钉改成 M4×8 的六角大螺钉	张红文/2017-10-16
A4.0	更改门搭开关 由 C 改造成铜夹	张红文/2017-12-12

24	I	V-106-1A5	门禁开关	1		欧姆龙
23	I	M25X1.5	塑胶堵塞件	4		
22	I	M16X1.5	塑胶堵塞件	3		
21	I	M12X1.5-A	塞件-A	2		
20	I	M12X1.5	塑胶堵塞件	10		
19	I	LABEL-3	MULTI 标签	1		
18	I	LABEL-2	ERICSSON 标签	1		
17	I	LABEL-1	EFORE 标签	1		
16	I	GB845-85-M4X8	内六角盘头螺钉	5		SUS 304
15	I	GB12615-90.3.2X6	封闭型盘头螺钉 3.2X6	2		铝合金AL5052
14	I	GB/T 6172 M6	防松六角螺母	16		SUS304
13	I	GB/T 6172 M4	防松六角螺母	2		SUS304
12	I	GB/T 818 M3x15	十字槽盘头螺钉	2		SUS304
11	I	GB/T 97.1 4	垫圈	5		SUS304
10	I	GB/T 93 4	弹簧垫圈	5		SUS304
9	I	GB/T 70.3-M4X8	内六角沉头螺钉	2		SUS304
8	I	ERS6345-PDU	电源分配单元	1		
7	I	ERS6345-HEX	50w/k 热交换机	1		
6	I	ERS6345-FJ-5	橡胶塞	1		
5	I	ERS6345-FJ-3	LED灯管	1		
4	I	ERS6345-10011	交换机风向往导向板-2	1		
3	I	ERS6345-10000	箱体	1		
2	I	DP-6	∅6垫片	16		SUS304
1	I	DP-4	∅4垫片	2		SUS304
序号	层	代 号	名 称	数量	供应商编号	备 注

 Communication Spring			PNAME: ERS6345户外机柜			PCODE: ERS6345-00000																	
			PFINISH:			PDESC: ERS6345户外机柜																	
						<table><tr><th>Visual</th><th>Angle</th><th>SCALE</th><th>WEIGHTING</th><th>OVERSIZ</th></tr><tr><td></td><td></td><td>0.08</td><td></td><td>AA40.0</td></tr><tr><td colspan="2">第 1 页</td><td colspan="3">共 1 页</td></tr></table>			Visual	Angle	SCALE	WEIGHTING	OVERSIZ			0.08		AA40.0	第 1 页		共 1 页		
Visual	Angle	SCALE	WEIGHTING	OVERSIZ																			
		0.08		AA40.0																			
第 1 页		共 1 页																					
DESIGN			NAME			DATE																	
DRW 张红文 Aug-18-17			PFINISH:			PCODE: ERS6345-00000																	
CHECK 王 芳 Aug-18-17			PNAME: ERS6345户外机柜			PDESC: ERS6345户外机柜																	
APPROVED 王 芳 Aug-18-17			PFINISH:			PCODE: ERS6345-00000																	
			PMATERIAL:			PDESC: ERS6345户外机柜																	
						Ningbo Spring Communication Technologies Co																	