



Description

Ningbo Spring 2 post open frame racks provide an ideal solution for housing small or large equipment in limited space. Their open design accommodates most standard 19-inch rackmount equipment, ensuring easy access to cables and equipment while promoting unobstructed airflow. Choose between floor mounting or utilizing the supplied casters for added versatility. Crafted from high-quality SPCC, these open frame racks boast a static loading capacity of up to 440 lbs., ensuring sturdy support for your equipment. Available in optional heights ranging from 27U to 47U, ST open frame racks offer a range of options to meet your specific needs, providing flexibility and reliability for your network infrastructure requirements.

Features

- Open design allows for superior airflow and easy equipment access.
- Can be shipped disassembled, reducing transportation and storage costs for added efficiency.
- Range of heights from 27U to 47U to match capacity requirements.


General Specification

Material	High Quality SPCC
Material Thickness	Standing Feet, Top and Bottom Beams 2 mm, Rails 1.5 mm
Finish	Powder Coating
Color	RAL9004
Width	585 mm
Height	27U, 32U, 37U, 42U, 47U
Rack Mount	19"
Static Loading Capacity	200 kgs/440 lbs.
Included Accessories	4xCasters

2 Post Open Frame Racks



Product Dimensions

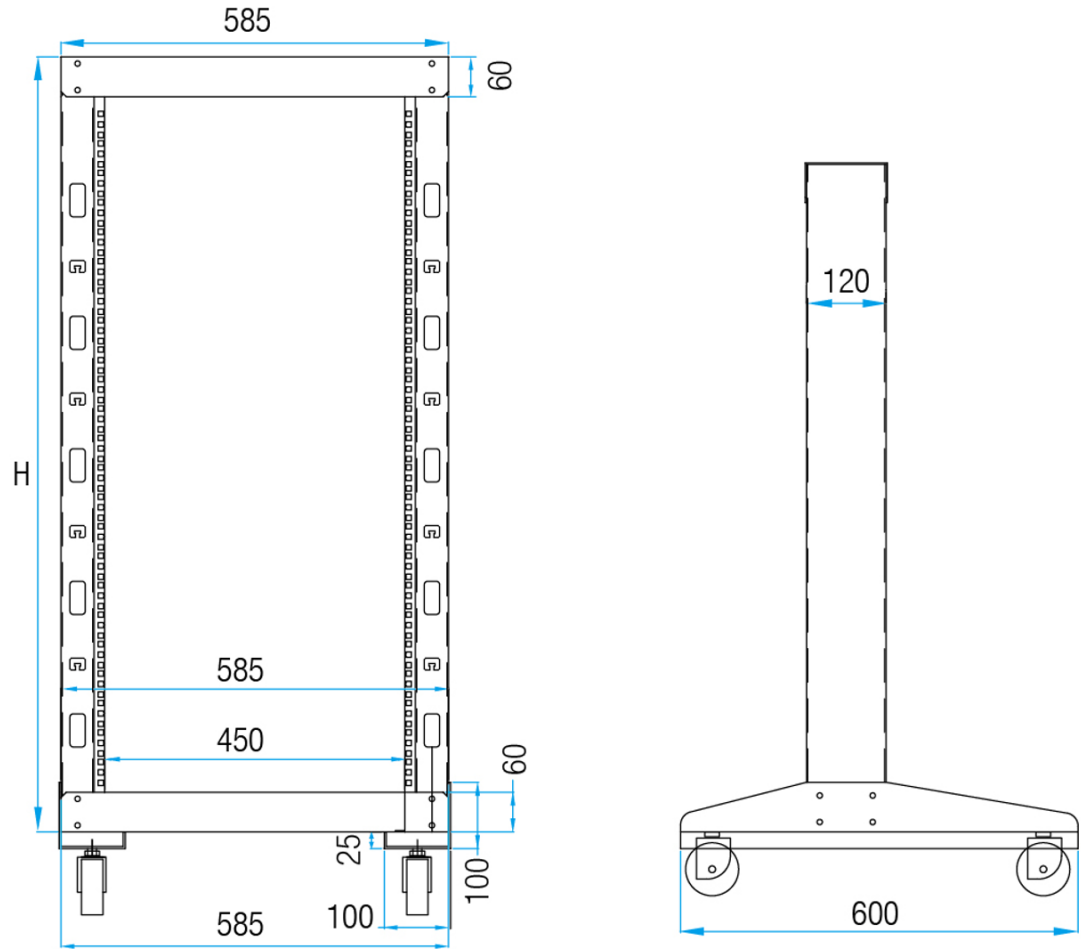

Ordering Information

NST	585	XX
NST=Ningbo Spring 2 Post Open Frame Rack	Width	Height
	5=585 mm	27=27U (1331 mm) 32=32U (1553 mm) 37=37U (1775 mm) 42=42U (1998 mm) 47=47U (2220 mm) <i>Note: above height excludes the height of casters</i>