


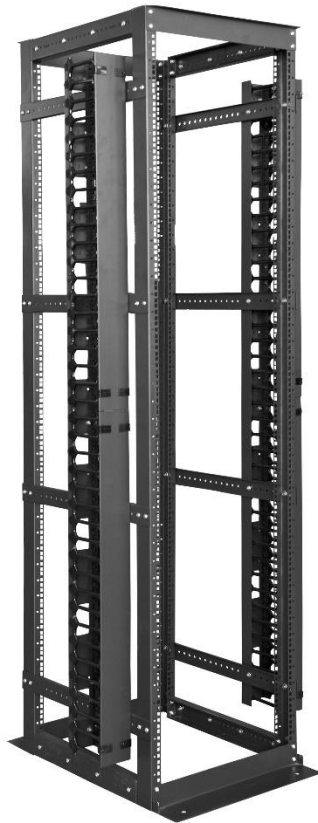

Description

Ningbo Spring 4 post open rack frames feature vertical rails and adjustable mounting depth from 23" to 37" (600 mm to 960 mm), ensuring compatibility with a wide range of servers, switches, data, AV, and other IT equipment. Combining the robustness of a cabinet with the accessibility of an open mounting system, they provide a versatile solution for network equipment and server deployment. Simplified installation and cabling processes ensure efficient maintenance and management of servers. Furthermore, the racks promote optimal cooling and heat dissipation through their unrestricted airflow design, safeguarding server performance. Optional accessories, including cable managers and various shelves, are available to tailor the configuration to your specific requirements.

Features

- Open design allows for superior airflow and easy equipment access.
- Can be shipped disassembled, reducing transportation and storage costs for added efficiency.
- Range of heights from 27U to 47U to match capacity requirements.
- Adjustable mounting depth from 23" to 37" (600 mm to 960 mm), ensuring compatibility with a wide range of servers, switches, data, AV, and other IT equipment.


General Specification

Material	High Quality SPCC
Material Thickness	2 mm
Finish	Powder Coating
Color	RAL9004
Width	515 mm
Height	27U, 32U, 37U, 42U, 47U
Rack Mount	19"
Static Loading Capacity	200 kgs/440 lbs.

4 Post Open Rack Frames, Adjustable Depth



Product Dimensions

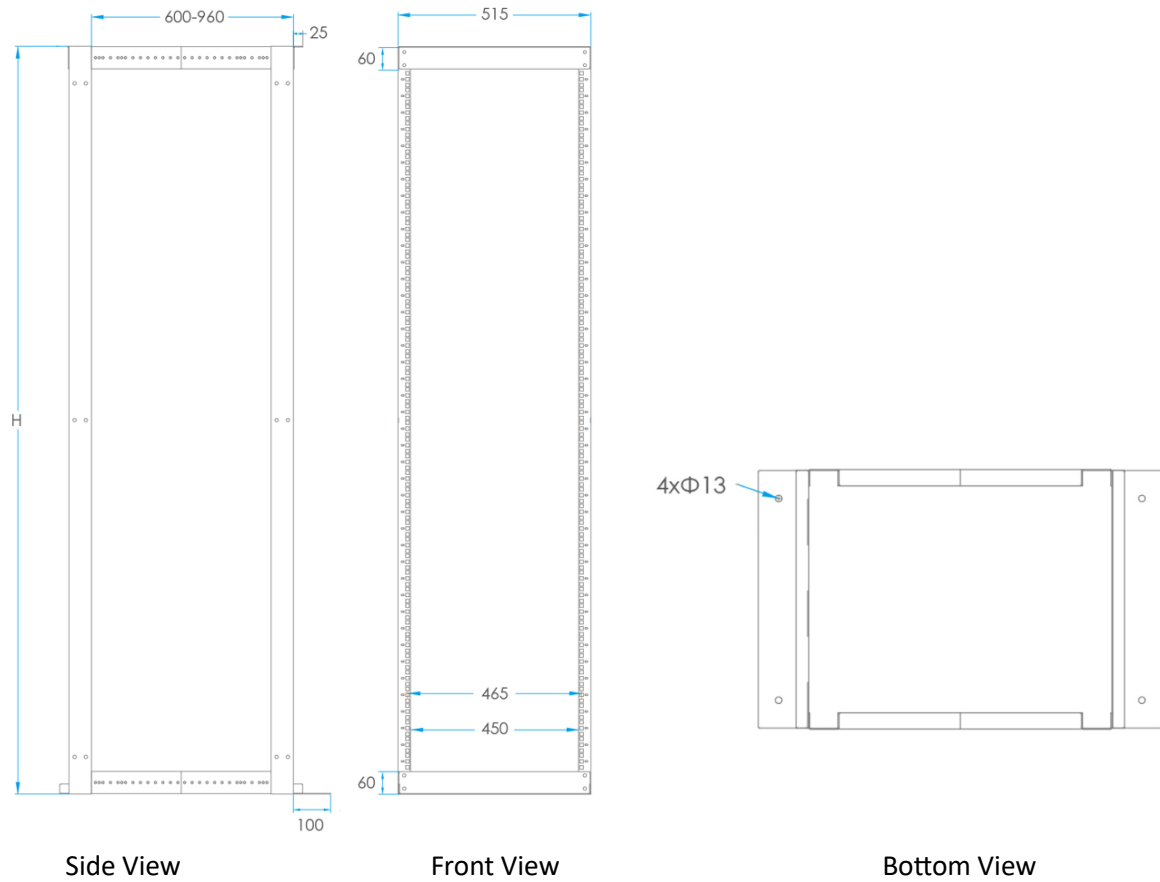

Ordering Information

NSR	515	XX
NSR=Ningbo Spring SR Four Post Open Frame Rack	Width	Height
	5=515 mm	27=27U (1331 mm) 32=32U (1553 mm) 37=37U (1775 mm) 42=42U (1998 mm) 47=47U (2220 mm)