



Description

SJ network rack enclosures stand out as the preferred choice for floor installations, boasting a robust structure capable of supporting static loads of up to 1700 lbs.

Heavy-duty casters are included to ensure easy and flexible movement. Optional adjustable leveling feet are available to enhance stability and fixation. The quick-open side panels enhance installation and maintenance efficiency, facilitating seamless access to your equipment.

Choose from multiple sizes to accommodate varying equipment space requirements, with the option for customization to meet specific needs.


Features

- Both top and bottom cable entries enhance installation flexibility, accommodating various cable configurations.
- Can be shipped disassembled, reducing transportation and storage costs for added efficiency.
- Offers multiple front and rear door styles (optional), providing customization options to suit specific needs.

General Specification


Material	High Quality SPCC
Material Thickness	Rails 2 mm, Other 1-1.2 mm
Finish	Power Coating
Color	RAL9004/RAL7035
Width	600 mm
Depth	600 mm
Height	18U, 22U, 27U, 32U, 37U, 42U, 47U
Rack Mount	19"
Access	Front Door/Rear Door/Side Panels
Locking Mechanism	Single Point Locking
Static Loading Capacity	800 kgs/1700 lbs.
Included Accessories	4xCasters, Grounding kits, M6 Screws & Nuts, Keys
Optional Accessories	Fans, Shelves, PDU, Blank Panels

Main Parts

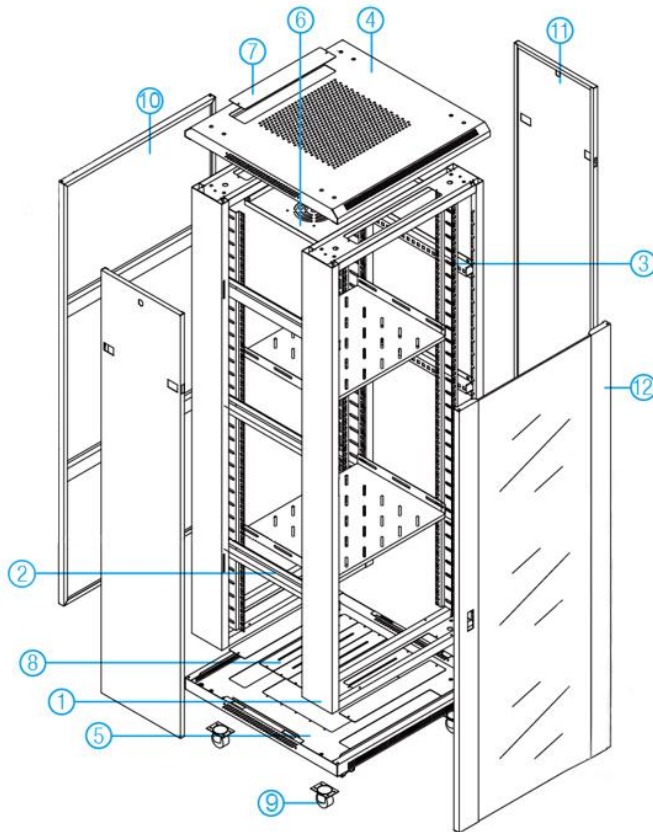

No.	Parts	Qty	Thickness
1	Front and Rear Frame	2	1.2 mm
2	Fix Beams	4/6	1.2 mm
3	19" Rails	4	2.0 mm
4	Top Panel	1	1.2 mm
5	Bottom Panel	1	1.0 mm
6	Fan Cover Plate	1	1.0 mm
7	Decorative Panels	3	1.0 mm
8	Cable Access Panels	5	1.0 mm
9	Casters	4	/
10	Rear Door	1	Optional
11	Side Panels	2	1.0 mm
12	Front Door	1	Optional

Door Options

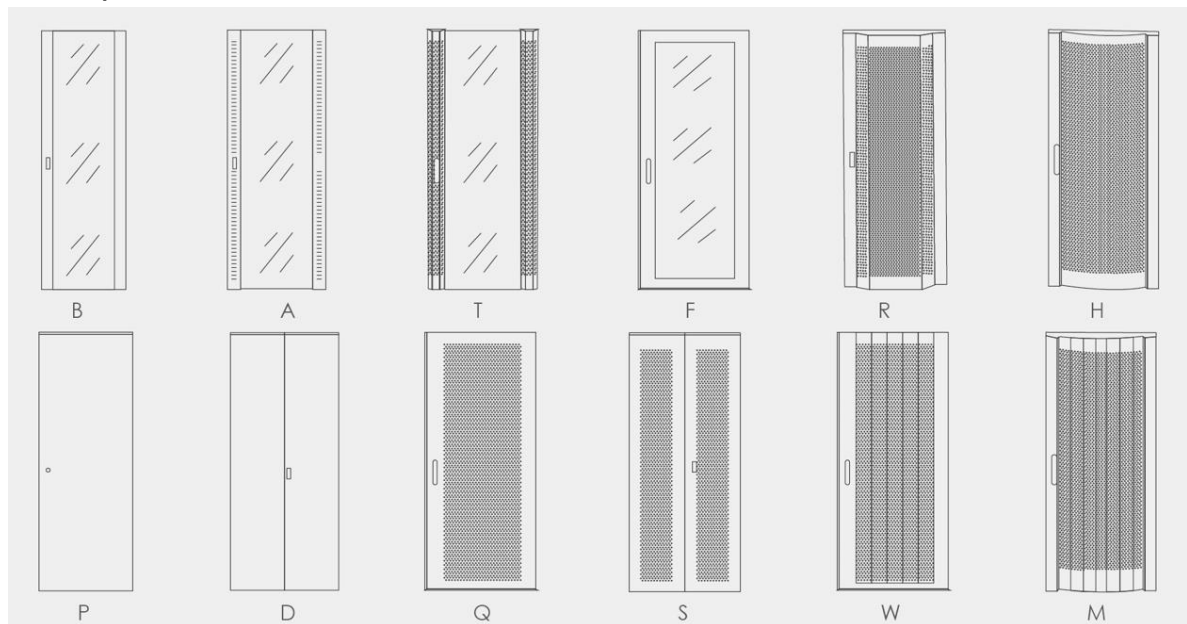

Ordering Information

NSJ	6	6	XX	X	X	X
NSJ=Ningbo Spring SJ Series Enclosures	Width	Depth	Height	Front Door	Rear Door	Color
	6=600 mm		18=18U 22=22U 27=27U 32=32U 37=37U 42=42U 47=47U	A=Glass Door with Perforated Boarders B=Standard Glass Door T=Glass Door with Special Perforated Boarders F=Glass Door with Four Sides Metal Frame R=Protruding Mesh Door H=Arc Mesh Door P=Solid Metal Door D=Split Metal Door Q=Standard Mesh Door S=Split Mesh Door W=High Density Mesh Door M=High Density Arc Mesh Door <i>Note: refer to Door Options section</i>		None=Black RAL9004 1=Gray RAL7035

Example: NSJ6622BD1 refers to SJ Network and Server Enclosure, 22U, 600 mm Width, 600 mm Depth, Standard Glass Front Door, Split Metal Rear Door, RAL7035