



Description

Ningbo Spring SJ server rack enclosures offer a customizable solution for data center build-outs, network rooms, or IT closets with the static loading capacity up to 1700 lbs.

Heavy-duty casters are included to ensure easy and flexible movement. Optional adjustable leveling feet are available to enhance stability and fixation. The quick-open side panels enhance installation and maintenance efficiency, facilitating seamless access to your equipment.

Available in dozens of size combinations, and 12 available door options, SJ server rack enclosures offer a variety of options and features to meet your specific needs.


Features

- Both top and bottom cable entries enhance installation flexibility, accommodating various cable configurations.
- Can be shipped disassembled, reducing transportation and storage costs for added efficiency.
- Offers multiple front and rear door styles (optional), providing customization options to suit specific needs.

General Specification


Material	High Quality SPCC
Material Thickness	Rails 2 mm, Other 1-1.2 mm
Finish	Power Coating
Color	RAL9004/RAL7035
Width	600 mm, 800 mm
Depth	800 mm, 900 mm, 1000 mm
Height	18U, 22U, 27U, 32U, 37U, 42U, 47U
Rack Mount	19"
Access	Front Door/Rear Door/Side Panels
Locking Mechanism	Single Point Locking
Static Loading Capacity	800 kgs/1700 lbs.
Included Accessories	4xCasters, Grounding kits, M6 Screws & Nuts, Keys
Optional Accessories	Fans, Shelves, PDU, Blank Panels

Main Parts

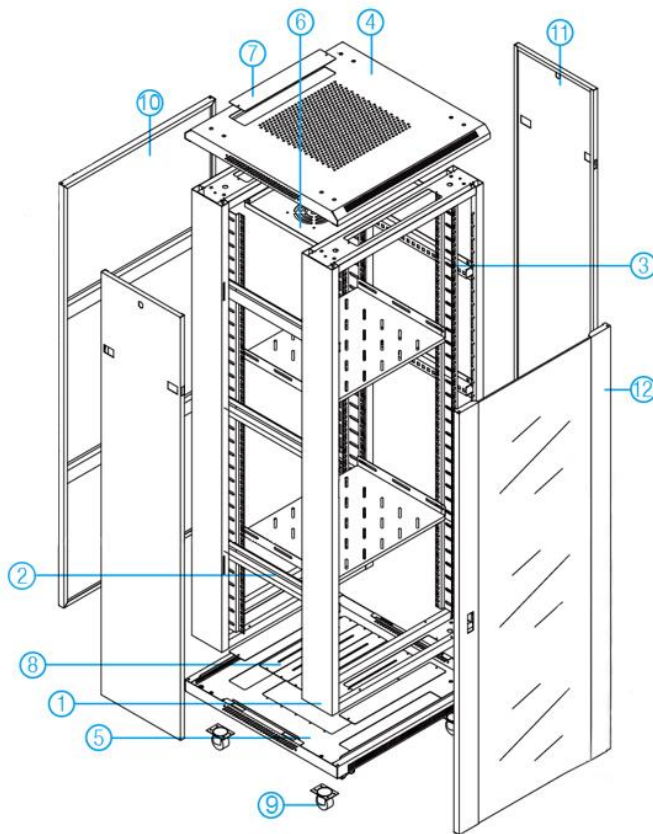

No.	Parts	Qty	Thickness
1	Front and Rear Frame	2	1.2 mm
2	Fix Beams	4/6	1.2 mm
3	19" Rails	4	2.0 mm
4	Top Panel	1	1.2 mm
5	Bottom Panel	1	1.0 mm
6	Fan Cover Plate	1	1.0 mm
7	Decorative Panels	3	1.0 mm
8	Cable Access Panels	5	1.0 mm
9	Casters	4	/
10	Rear Door	1	Optional
11	Side Panels	2	1.0 mm
12	Front Door	1	Optional

Door Options

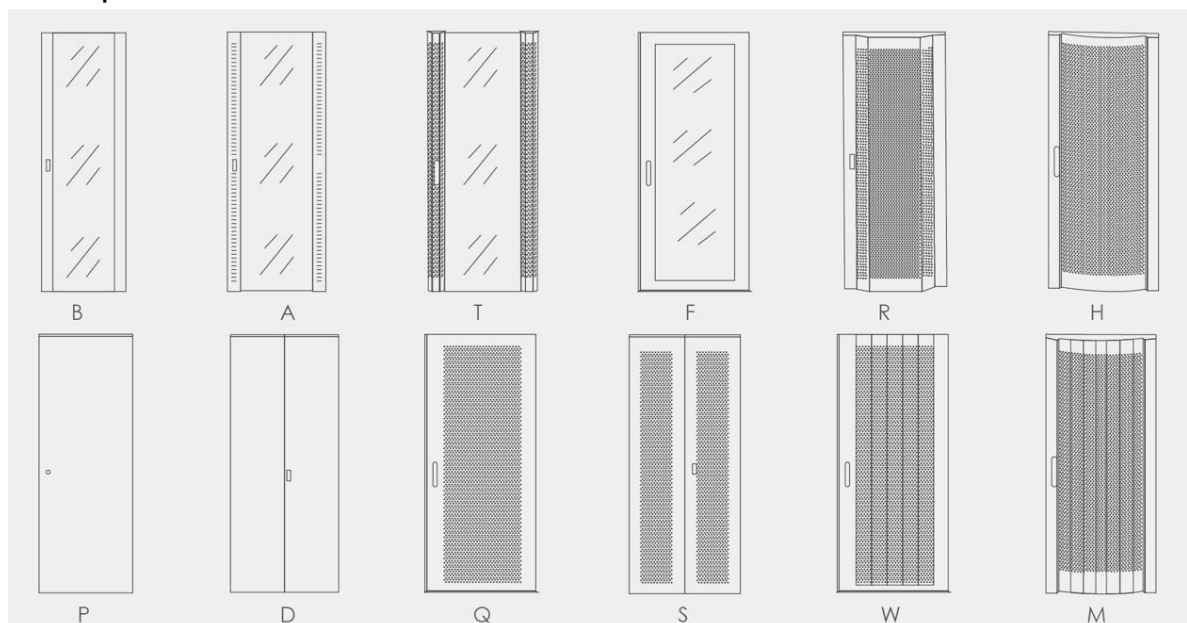

Ordering Information

NSJ	X	X	XX	X	X	X
NSJ=Ningbo Spring SJ Series Enclosures	Width	Depth	Height	Front Door	Rear Door	Color
	6=600 mm	8=800 mm	18=18U	A=Glass Door with Perforated Boarders		None=Black
	8=800 mm	9=900 mm	22=22U	B=Standard Glass Door		RAL9004
		0=1000 mm	27=27U	T=Glass Door with Special Perforated Boarders		1=Gray
			32=32U	F=Glass Door with Four Sides Metal Frame		RAL7035
			37=37U	R=Protruding Mesh Door		
			42=42U	H=Arc Mesh Door		
			47=47U	P=Solid Metal Door		
				D=Split Metal Door		
				Q=Standard Mesh Door		
				S=Split Mesh Door		
				W=High Density Mesh Door		
				M=High Density Arc Mesh Door		
				<i>Note: refer to Door Options section</i>		

*Example: NSJ8042AD refers to SJ Server Enclosure, 42U, 800 mm Width,
1000 mm Depth, Glass Door with Perforated Boarders Front Door, Split Metal
Rear Door, RAL9004*