



200kW Hybrid inverter / 1500 kWh Battery

Air Cooling Commercial & Industrial Energy Storage System



Flexible

Scalable
Highly integrated
All pre-assembled



Reliable

Electric safety protection
Multi level battery protection
Fire suppression system



Efficient

Intelligent cooling system
Higher system efficiency




Smart

State monitoring & faults record
Battery performance monitoring

— DC — AC
--- COM --- Optional



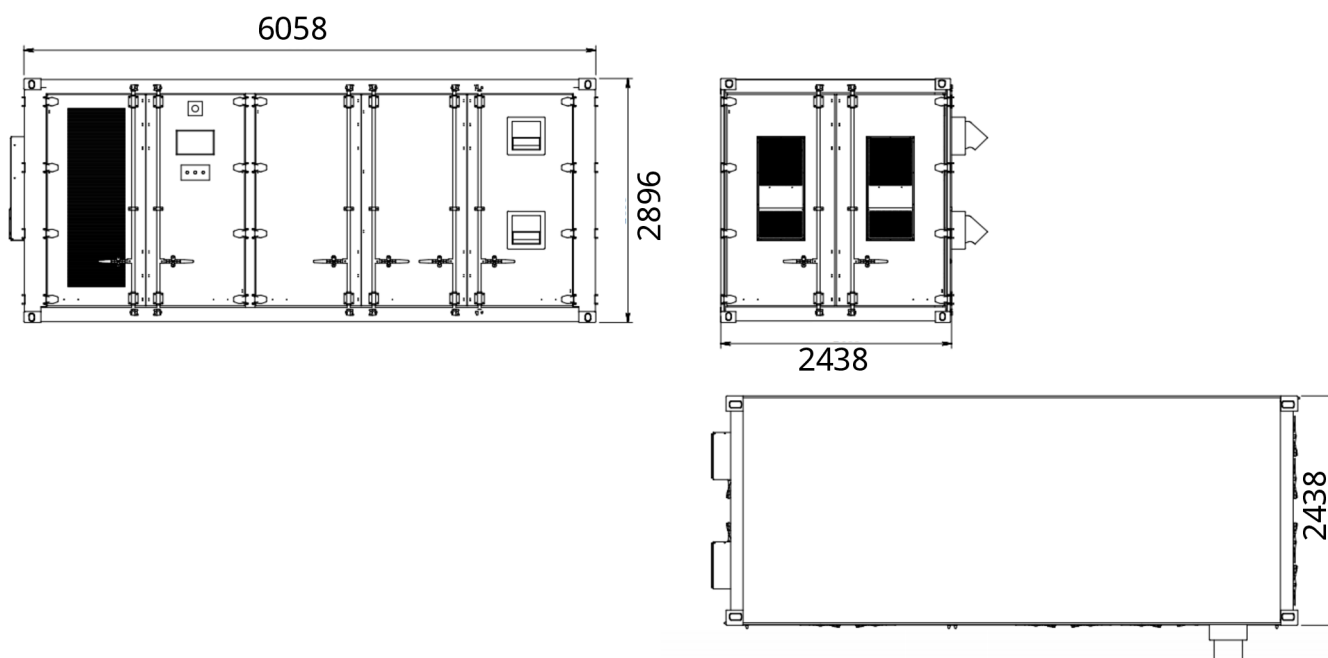

PBT1500-HP

DC Side Parameters	
Full Configuration Capacity (kWh)	1736
Cell Parameters	LFP-3.2 V / 314 Ah
Module Parameters	LFP-1P48S*36 / 48.23 kWh
Rated Voltage (V)	921.6 V
Maximum DC Current (A)	150 A
DC Voltage Range (V)	672~864
Charge/Discharge Rate	70%EOL @ 25°C / 0.5C
Cycle Life (Cycles)	7,000≥80%DOD
AC Side Parameters	
Rated Power	200 kW
Rated Output Voltage	400 VAC, 3L+N+PE
Rated Output Current	318 A
Frequency	50 Hz / 60 Hz
Total Harmonic Distortion (THD) of Voltage	< 3% (at rated power)
Continuous Overload	1.2Pn for 1 minute
Power Factor Range	-1~+1
Permissible Grid Voltage	
Standard Parameters	
Communication Interface	RS-485 / CAN
Temperature Control Solution	Air Cooling
Fire Protection Solution	Aerosol Fire Protection System
Altitude (m)	3000m (>2000m Derating)
Operation temperature range (°C)	Charge Temperature: 0°C~60°C Discharge Temperature: -20~60°C
Permissible Relative Humidity (%Rh)	0~95% Non-condensing
Protection Rating	IP55
Anti-corrosion degree	C4
Dimensions (WDH) (mm)	6058 x 2438 x 2896
Full Configuration Weight	18T
Product Certification	IEC62619, CE-EMC, LVD, ROHS, UN38.3